

# FCC TEST REPORT

**Product Name:** 350W air-cooled iron shell power supply

N/A Trademark:

Model Number: ZZ-RFP350-24

Prepared For: Shenzhen ZhengZhan Technology Co., Ltd

Guangdong, China, Shenzhen, Baoan District, Songgang, Huamei Address:

Road, Huamei Building, 617, China

Manufacturer: Shenzhen ZhengZhan Technology Co., Ltd

Guangdong, China, Shenzhen, Baoan District, Songgang, Huamei Address:

Road, Huamei Building, 617, China

Prepared By: Shenzhen BCTC Testing Co., Ltd.

BCTC Building & 1-2F, East of B Building, Pengzhou Industrial,

Address: Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an

District, Shenzhen, China

Sample Received Date: May 12, 2020

Sample tested Date: May 12, 2020 to May 26, 2020

Issue Date: May 29, 2020

Report No.: BCTC2005001886EN1

**Test Standards** 47 CFR FCC Part 15 Subpart B

**PASS** Test Results


> Compiled by: Reviewed by

Eric Yang

Approved by:

Zero Zhou/Manager

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.





# **TABLE OF CONTENT**


Test Report Declaration	Page
1. VERSION	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	
4. PRODUCT INFORMATION AND TEST SETUP	
5. TEST FACILITY AND TEST INSTRUMENT USED	
6. CONDUCTED EMISSION AT THE MAINS TERMINALS TE	
6.1 Block Diagram Of Test Setup	8
6.2 Limit	8
6.3 Test procedure	
6.4 Test Result	9
6.3 Test procedure	11
7.1 Block Diagram Of Test Setup	11
7.2 Limit	11
7.3 Test Procedure	12
7.4 Test Result	
8. EUT PHOTOGRAPHS	15
9. EUT TEST SETUP PHOTOGRAPHS	18

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
BCTC2005001886E	May 29, 2020	Original	Invalid
BCTC2005001886EN1	Jul. 21, 2020	Revised	Valid
, C,	, (		,





# 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Standard	Test Item	Test result
FCC 15.107	Conducted Emission	Pass
FCC 15.109	Radiated Emission	Pass



# 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Value (dB)
Conducted Emission (150kHz-30MHz)	3.20
Radiated Emission(30MHz~1GHz)	4.80
Radiated Emission(1GHz~6GHz)	4.90



# PRODUCT INFORMATION AND TEST SETUP

#### **Product Information** 4.1

Ratings:	Input: AC100-240V 50/60Hz Output: DC24V 14.5A
The highest frequency internal sources of the (less than 108)MHz:	<ul> <li>between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz.</li> <li>between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz.</li> <li>above 1 GHz, the measurement shall be made up to 5</li> </ul>
1.	times the highest frequency or 6 GHz, whichever is less.

# **Test Setup Configuration**

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

#### 4.3 Support Equipment

No	Device Type	Brand	Model	Series No.	Data Cable	Power Cord
1.	PC	Lenovo	ThinkPad S2	` <u>`</u>	2°C)	~ ·
2	computers	dell	T3250 MD			

#### Notes:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### **Test Mode** 4.4

Test item	Test Mode	Test Voltage
Conducted Emission (150KHz-30MHz) Class B	Full load	AC 120V/60Hz*
Radiated mission(30MHz-1GHz) Class B	Full load	AC 120V/60Hz*
All test mode were tested and passed,	only Conducted Emission	ons, Radiated Emissions

shows (\*) is the worst case mode which were recorded in this report

Report No.: BCTC2005001886EN1



## 5. TEST FACILITY AND TEST INSTRUMENT USED

#### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

#### 5.2 Test Instrument Used

	Disturbance voltages Test									
Equipment Manufacturer Model# Serial# Last Cal. Next Cal.										
Receiver	R&S	ESR3	102075	Jun. 13, 2019	Jun.12, 2020					
LISN	R&S	ENV216	101375	Jun. 13, 2019	Jun.12, 2020					
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\					


Radiated disturbance Test (966 chamber)								
Equipment	Equipment Manufacturer		ent Manufacturer Model# Serial#			Last Cal.	Next Cal.	
966 chamber	ChengYu	966 Room	966	Jun. 19, 2018	Jun. 18, 2021			
Receiver	R&S	ESR3	102075	Jun. 13, 2019	Jun. 12, 2020			
Receiver	R&S	ESRP	101154	Jun. 13, 2019	Jun. 12, 2020			
Amplifier	Schwarzbeck	BBV9744	9744-0037	Jun. 25, 2019	Jun. 24, 2020			
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	VULB9163 -942	Jun. 22, 2019	Jun. 21, 2020			
Horn Antenna	SCHWARZBE CK	BBHA9120 D	1201	Jun. 22, 2019	Jun. 21, 2020			
Amplifier	Schwarzbeck	BBV9718	9718-309	Jun. 25, 2019	Jun. 24, 2020			
Software	Frad	EZ-EMC	FA-03A2 RE	401	\			



#### CONDUCTED EMISSION AT THE MAINS TERMINALS TEST

## 6.1 Block Diagram Of Test Setup

#### For mains ports:

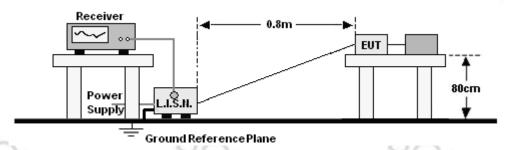

#### 6.2 Limit

#### **Limits for Class B devices**

	Limits	S
/MU=\	dB(μ\	<u>/)</u>
(MHz)	Quasi-peak	Average
0,15 to 0,50	66 to 56*	56 to 46*
0,50 to 5	56	46
5 to 30	60	50

Notes: 1. \*Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

#### 6.3 Test procedure

#### For mains ports:


- a. The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- b. The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.



# 6.4 Test Result

Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	Line
Test Voltage:	AC 120V/60Hz	Test Mode:	Full load


Report No.: BCTC2005001886EN1

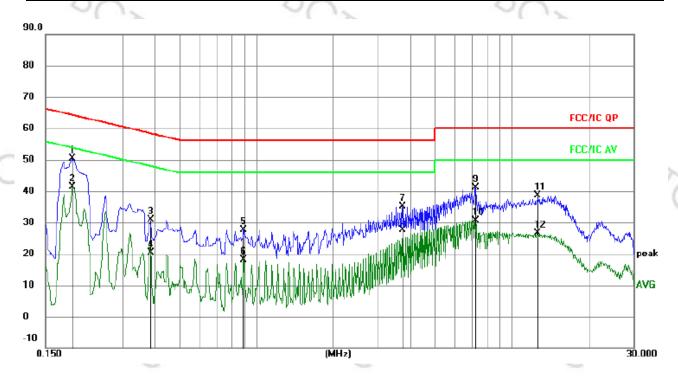

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz		dB	dBuV	dBuV	dB	Detector	Comment
1		0.1904	40.89	9.47	50.36	64.02	-13.66	QP	
2	*	0.1904	31.96	9.47	41.43	54.02	-12.59	AVG	
3		0.3871	21.37	9.51	30.88	58.13	-27.25	QP	
4		0.3871	10.86	9.51	20.37	48.13	-27.76	AVG	
5		0.8944	17.91	9.60	27.51	56.00	-28.49	QP	
6		0.8944	8.49	9.60	18.09	46.00	-27.91	AVG	
7		3.7198	25.48	9.71	35.19	56.00	-20.81	QP	
8		3.7198	17.84	9.71	27.55	46.00	-18.45	AVG	
9		7.1754	31.30	9.72	41.02	60.00	-18.98	QP	
10		7.1754	21.03	9.72	30.75	50.00	-19.25	AVG	
11		12.5156	28.99	9.69	38.68	60.00	-21.32	QP	
12		12.5156	16.90	9.69	26.59	50.00	-23.41	AVG	



Temperature:	<b>26</b> ℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	Neutral
Test Voltage:	AC 120V/60Hz	Test Mode:	Full load

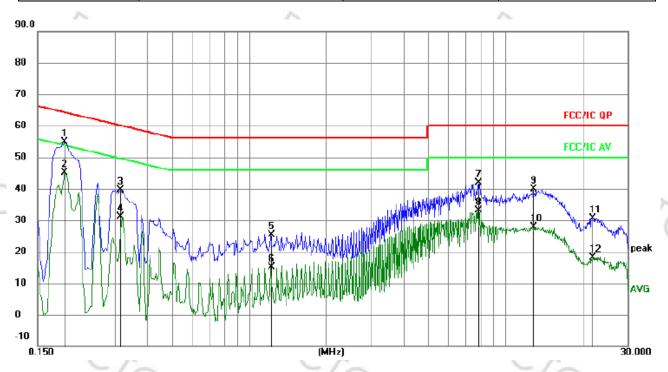

No	o. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz		dB	dBuV	dBuV	dB	Detector	Comment	
1	1	0.1905	45.32	9.47	54.79	64.01	-9.22	QP		
- 2	2 *	0.1905	35.69	9.47	45.16	54.01	-8.85	AVG		
3	3	0.3165	30.15	9.57	39.72	59.80	-20.08	QP		
	1	0.3165	21.50	9.57	31.07	49.80	-18.73	AVG		
- 5	5	1.2210	15.89	9.57	25.46	56.00	-30.54	QP		
- 6	3	1.2210	5.54	9.57	15.11	46.00	-30.89	AVG		
7	7	7.8315	32.17	9.71	41.88	60.00	-18.12	QP		
8	3	7.8315	23.53	9.71	33.24	50.00	-16.76	AVG		
	9	12.8445	30.30	9.70	40.00	60.00	-20.00	QP		
10	)	12.8445	18.09	9.70	27.79	50.00	-22.21	AVG		
11	1	21.8759	20.97	9.77	30.74	60.00	-29.26	QP		
12	2	21.8759	8.47	9.77	18.24	50.00	-31.76	AVG		

#### Remark:


- 1. All readings are Quasi-Peak and Average values.
- 2. Factor = Insertion Loss + Cable Loss.



# 7. RADIATION EMISSION TEST

# 7.1 Block Diagram Of Test Setup

30MHz ~ 1GHz:

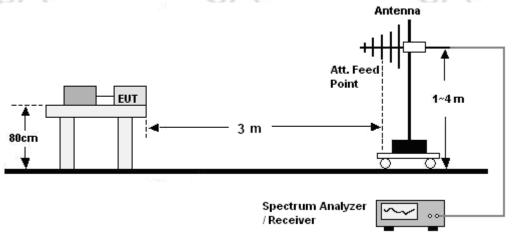

#### 7.2 Limit

#### **Limits for Class B devices**

Frequency (MHz)	limits at 3m dB(μV/m)						
	QP Detector	PK Detector	AV Detector				
30-88	40.0						
88-216	43.5						
216-960	46.0	O =					
960 to 1000	54.0	QC->					
Above 1000		74.0	54.0				

Note: The lower limit shall apply at the transition frequencies.



# 7.3 Test Procedure

#### 30MHz ~ 1GHz:

- a. The Product was placed on the nonconductive turntable 0.8 m above the ground at a chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

#### Remark:


The highest frequency of the internal sources of the EUT is less than 108 MHz, so the measurement shall only be made up to 1 GHz.




# 7.4 Test Result

Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode:	Full load

Report No.: BCTC2005001886EN1

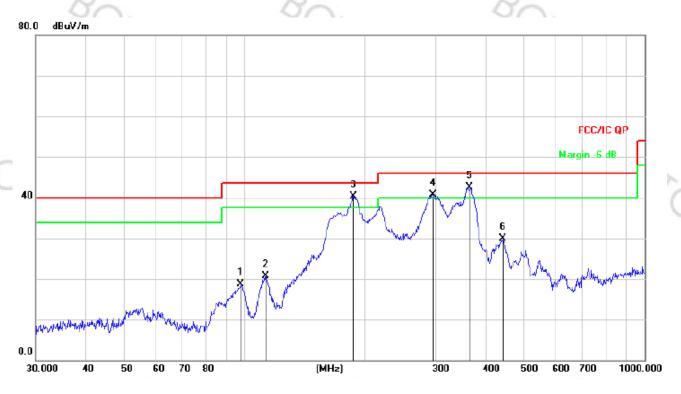


N	o. <b>N</b>	Иk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree		
			MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree	Comment	
_	1		97.7983	35.43	-16.68	18.75	43.50	-24.75	QP				
	2	1	12.9196	37.76	-17.11	20.65	43.50	-22.85	QP				
	3 '	* 1	87.0958	57.53	-17.13	40.40	43.50	-3.10	QP				
	4 !	! 2	95.1469	54.48	-13.75	40.73	46.00	-5.27	QP				
	5 !	! 3	65.5391	54.43	-11.88	42.55	46.00	-3.45	QP				
	6	4	41.7426	39.97	-10.15	29.82	46.00	-16.18	QP				





Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode:	Full load

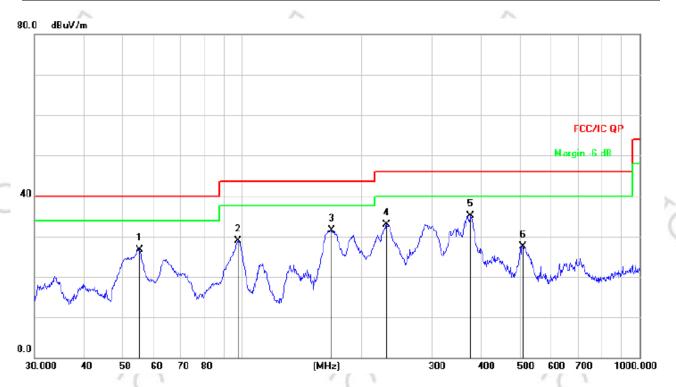

No	. Mk	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree	Comment	
1		55.2207	42.03	-15.40	26.63	40.00	-13.37	QP				
2	2	97.4560	45.73	-16.74	28.99	43.50	-14.51	QP				
3	3	167.8243	49.90	-18.36	31.54	43.50	-11.96	QP				
4	-	230.9068	48.41	-15.59	32.82	46.00	-13.18	QP				
	*	375.9385	46.81	-11.64	35.17	46.00	-10.83	QP				
6	6	508.2582	36.31	-8.73	27.58	46.00	-18.42	QP				

## Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

8C/C

8C/C




# 8. EUT PHOTOGRAPHS

## **EUT Photo 1**



#### **EUT Photo 2**

8070 8070

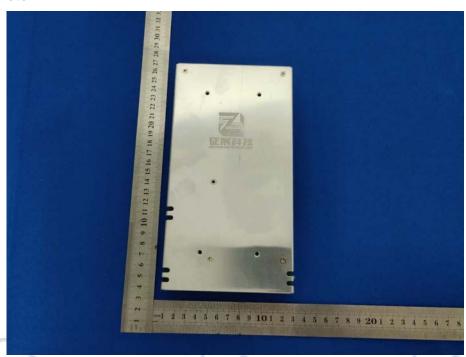

8C/C


0



#### **EUT Photo 3**




#### **EUT Photo 4**

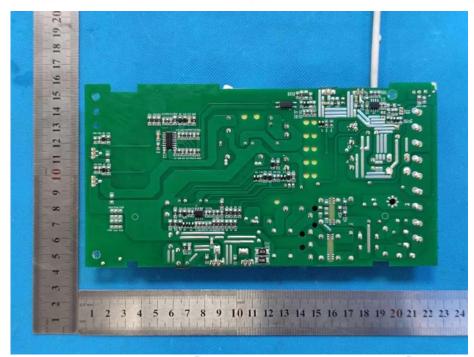



#### **EUT Photo 5**

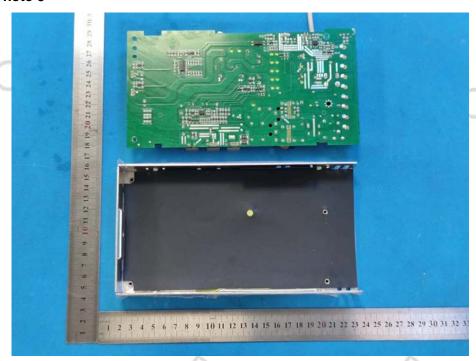

2-10



# 9. EUT TEST SETUP PHOTOGRAPHS

#### Conducted emission



#### Radiated emission



**\*\*\*\*** END OF REPORT **\*\*\***